

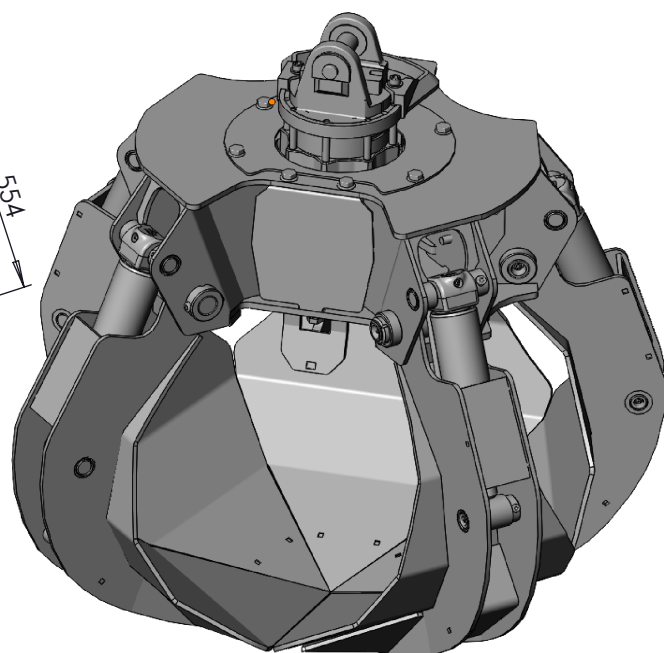
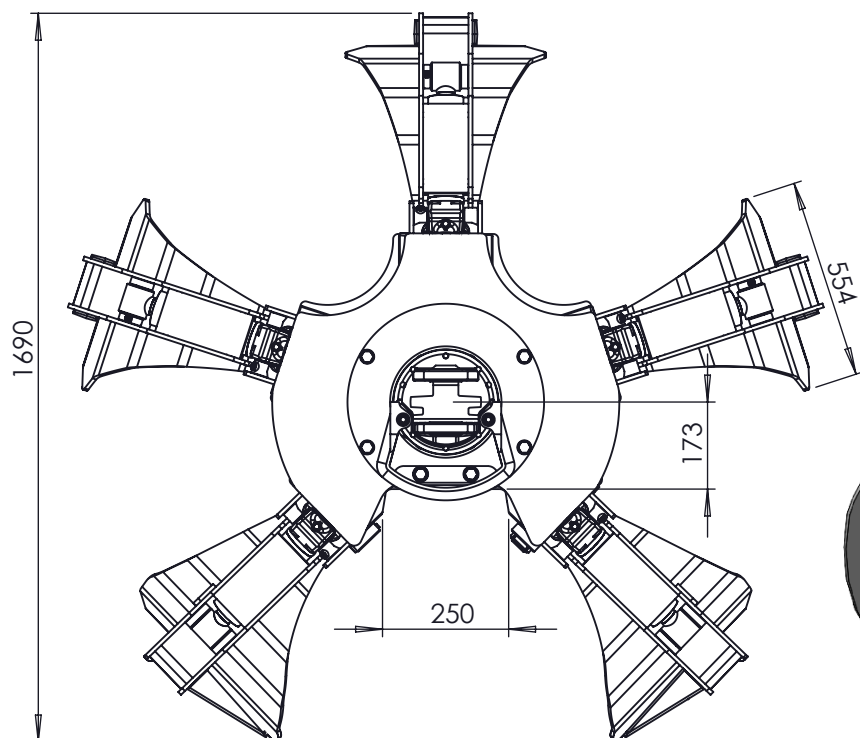
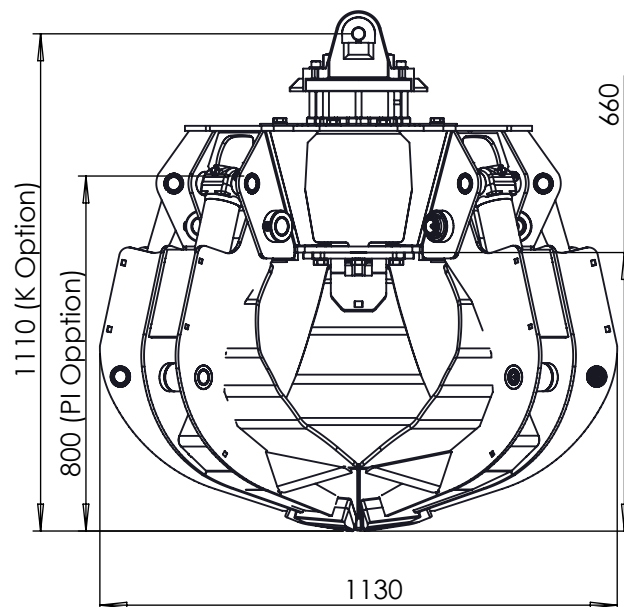


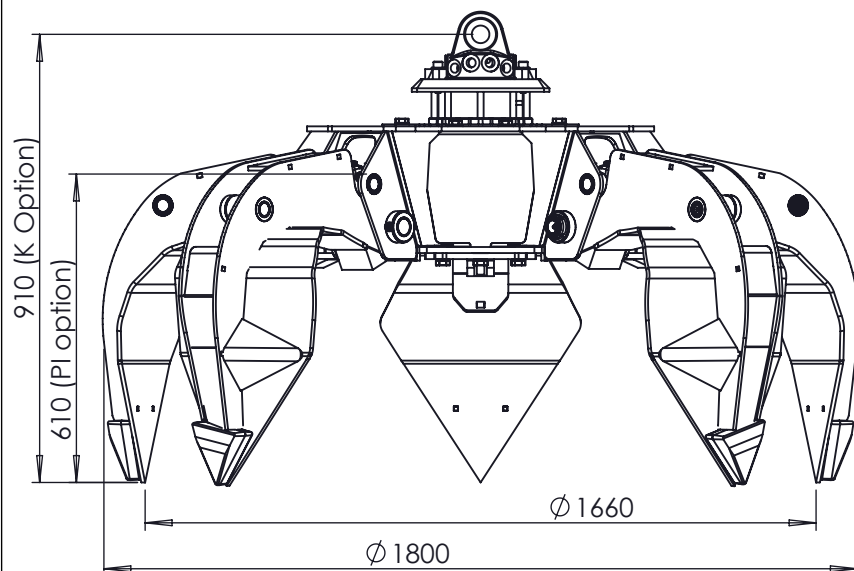


Link (Optional) / Attacco (Opzionale)




Peso / Weight = Kg. 10

Rotator GV6 / Rotatore GV6



Connection Rotation = 1/2" Gas female
Connection Grab = 1/2" Gas female

Bolted hook / Gancio inferiore
Optional



THE MANUFACTURER MAINTAINS THE RIGHT TO MODIFY ALL PRODUCTS IN ORDER TO IMPROVE PERFORMANCE. ALL DATA SUPPLIED ARE BASED UPON DATA COLLECTIONS AND AS SUCH CANNOT BE UTILIZED AS A REFERENCE FOR FORECAST PRODUCT FUTURE PERFORMANCE.

IL PRODUTTORE SI RISERVA IL DIRITTO DI APPORTARE MODIFICHE SUI PRODOTTI SENZA PREAVVISO. IL PRODUTTORE HA IL DIRITTO DI APPORTARE MIGLIORIE AL PRODOTTO AL FINE DI AUMENTARE LE PERFORMANCE DELLO STESSO. I DATI RIPORTATI NON SONO VINCOLANTI.

CHECK VALVE IS OPTIONAL

VALVOLA DI BLOCCO OPZIONALI

THIS DRAWING IS OUR PROPERTY. REPRODUCTION OR DISCLOSURE OF IT IS PROHIBITED WITHOUT OUR WRITTEN APPROVAL.

QUESTO DOCUMENTO E' DI NOSTRA PROPRIETA'. E' VIETATA LA RIPRODUZIONE O LA DIVULGAZIONE SENZA LA NOSTRA AUTORIZZAZIONE SCRITTA

Capacity Capacità m ³	0.3	Max pressure Pressione massima Bar	Bucket	320
Tines Denti n°	5	Max rec oil flow Flusso dell'olio massimo Lt./min.	Rotator	200
Max load Portata massima Ton.	3	Max torque (200 Bar) Coppia massima (200 Bar) Nm	Bucket	80
Excavator weight(Indicative) Peso escavatore(Indicativo) Ton.	/	Rotator wheight (Kg) Peso rotatore	Rotator	25
Closing force single tine Forza chiusura singolo dente kN (320 Bar)	15	N° of revolutions/min.(25 Lt.) N° di giri/min. (25 Lt.)	Rotator GV6	1400
			Rotator GV6	46
			Rotator	40



Item:

SHMZ305_A1

Description:

**Polyp grab five teeth,
designed for Z crane**

Weight / Peso Kg. = 425 without rotator

Designed:

Date:

F.GUSELLA

30/03/2023

